


Triple Channel Linear DC Power Supply

MPS-H-3 Series

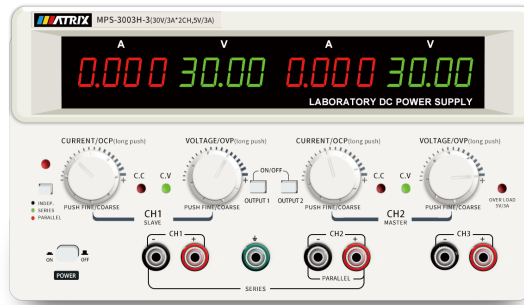

- One key series and parallel independent setting, convenient and easy to use
- In series or parallel, direct display of current and voltage values, no need to calculate
- 4 digits display, 10mV/1mA resolution
- CH1 and CH2 can be controlled independently
- Current can be set without short circuit;
- Slow startup circuit design, so that the startup current pulse is smaller
- USB, RS-232/485 are optional
- Current and voltage output can be set in a certain range, which avoid over tuning to break tested object
- Current and voltage adjusting knob adopts coding switch design, easy to use, long life, low failure rate
- OVP/OCF function

Model	MPS-3003H-3			MPS-3005H-3			MPS-3010H-3			MPS-6003H-3			MPS-6005H-3			
Input power	110V/220V switchable 50Hz/60Hz															
Parameter	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	
Rated output	Voltage	0~30V	0~30V	5V	0~30V	0~30V	5V	0~30V	0~30V	5V	0~60V	0~60V	5V	0~60V	0~60V	5V
	Current	0~3A	0~3A	3A	0~5A	0~5A	3A	0~10A	0~10A	3A	0~3A	0~3A	3A	0~5A	0~5A	3A
Load regulation	Voltage	≤0.01%+5mV	≤15mV	≤0.01%+5mV	≤15mV	≤0.01%+8mV	≤15mV	≤0.01%+5mV	≤15mV	≤0.01%+5mV	≤15mV	≤0.01%+5mV	≤15mV	≤0.01%+5mV	≤15mV	≤15mV
	Current	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA
Line regulation	Voltage	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+8mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV
	Current	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA
Set resolution	Voltage	10mV	-	10mV	-	10mV	-	10mV	-	10mV	-	10mV	-	10mV	-	10mV
	Current	1mA	-	1mA	-	1mA	-	1mA	-	1mA	-	1mA	-	1mA	-	1mA
Readback resolution	Voltage	10mV	-	10mV	-	10mV	-	10mV	-	10mV	-	10mV	-	10mV	-	10mV
	Current	1mA	-	1mA	-	1mA	-	1mA	-	1mA	-	1mA	-	1mA	-	1mA
Set value accuracy	Voltage	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV
	Current	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA
Readback accuracy	Voltage	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV	-	≤0.03%+10mV
	Current	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA	-	≤0.1%+5mA
Parallel mode	Power effect	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.02%+8mV	-	≤0.02%+5mV	-	≤0.02%+5mV	-	≤0.02%+5mV	-	≤0.02%+5mV	-	≤0.02%+5mV
	Load effect	≤0.01%+5mV	-	≤0.02%+5mV	-	≤0.02%+8mV	-	≤0.02%+5mV	-	≤0.02%+5mV	-	≤0.02%+5mV	-	≤0.02%+5mV	-	≤0.02%+5mV
Serial mode	Power effect	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+8mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV
	Load effect	≤0.01%+5mV	-	≤0.02%+5mV	-	≤0.01%+8mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV	-	≤0.01%+5mV
Ripple and Noise	Voltage	≤2mV(rms)														
	Current	≤5mA(rms)														
Working temperature	0~40°C ≤80%RH															
Size (W*H*D)	mm 250*150*330															
Weight	kg	8			9			12			9			9		