

ESD SURFACE RESISTANCE TESTER 100V

The Labeohm EVO and the Labeohm EASY are instruments that measure the surface resistance and the ground resistance of mats, worktops, floorings and other objects in the EPA area.

The embedded probes are suitable for surface resistance measure, connecting one ground cord the resistance to ground can be read, and two external probes can be connected for point to point measurements.

Both instruments are pocket-size and use 2 embedded parallel electrodes, in accordance with DIN EN 100015/1.

The Easy version allows to measure the order of magnitude of surface resistance or resistance to ground.

The EVO version is more accurate (accuracy of ½ decade) , it displays up to one significant digit and it is equipped with a graphical display and programmable sound alarm


Measuring range: from 10^4 to $10^{12} \Omega$

Test voltage: 10V R<100K Ω , 100V R>100K Ω

Electrodes: Soft conductive rubber

Dimensions: 80x120x27mm

ISO9000 Traceable Calibration Report is supplied

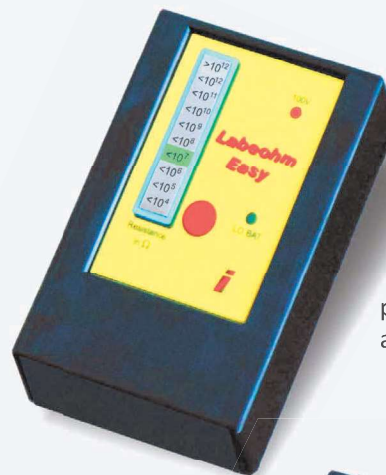

programmable
acoustic alarm

LABEOHM EASY



LABEOHM EVO

Display: LCD graphic
102x64pixel, 36x26mm



LABEOHM Kit

9265.051	LABEOHM EVO 100V, cable,battery,box included
9265.055	LABEOHM EASY 100V, cable,battery,box included
9265.065	Cylindrical SHIELDED PROBE 63mm diameter, 2.3Kg weight
9265.070	Concentric ring PROBE 63/30mm diameter, 2.3Kg weight
9265.056	Portable Kit including 9265.051 tester, two 9265.065, probes and carrying case
9265.057	Portable Kit including 9265.055 tester, two 9265.065, probes and carrying case
9265.003	Labeohm recalibration ISO9000 Traceable Calibration Report is included

9265.065	Shielded probe, 63mm, weight 2,3Kg, one BNC socket, two 4mm sockets
9265.070	Concentric ring probe, 63/30mm, weight 2,3Kg, one BNC socket, three 4mm sockets
9265.047	Counter-electrode, 150 x 150mm
9265.013B	Cable 1,5m - jack 3,5/ 4mm banana plugs terminated, BLACK (only for 9265.051 and 9265.055)
9265.012B	Cable 1.5m - 4mm banana plugs terminated, BLACK
9265.012R	Cable 1.5m - 4mm banana plugs terminated, RED
9265.008	Coaxial cable, L=1m, BNC plug / 2x4mm banana plugs
9265.072	T-handle with thread end M5 H = 25cm (only for 9265.070 and 9265.065)