


# Programmable AC Power Source

APS-7000 Series



APS-7105/7100

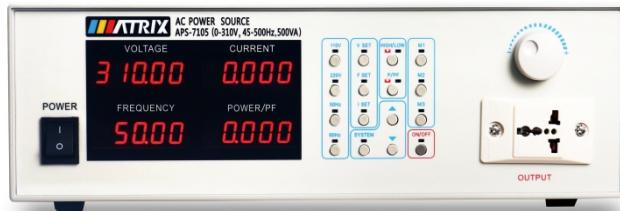

APS-7200/7300/7500

- The advanced direct digital frequency synthesizer (DDS) waveform is used to achieve high frequency stability, good continuity and accurate measurement
- Keyboard shortcuts: 110V, 220V, 50Hz, 60Hz shortcuts self-assembly
- Key lock function prevents inadvertent touch
- With key lock M1, M2 and M3 three sets of memory, can store the commonly used voltage V and frequency F, easy to recall them by one key
- Five display windows: voltage V, frequency F, current I, power P/power factor PF, display more accurately

- Overload capacity, 300% overload 2S
- Intelligent analysis function: automatically determine the cause of failure ,status and display the code when the alarm is reported
- With 100% loading and unloading, the stabilizing reaction time is within 20ms
- RS485, RS232, Ethernet communication interface or simulation control mode (optional)
- Adopt input and output isolation mode
- Has soft start function to avoid the damage to power supply caused by the instantaneous impulse current of the load (such as motor) when power on.

| Model                   | APS-7105  | APS-7100    | APS-7200    | APS-7300    | APS-7500    | APS-7110    |
|-------------------------|---|-------------|-------------|-------------|-------------|-------------|
| Capacity                | 500VA   | 1KVA        | 2KVA        | 3KVA        | 5KVA        | 10KVA       |
| Working mode            | SPWM  |             |             |             |             |             |
| The input               |   |             |             |             |             |             |
| Number of phase         | 1Φ2W  |             |             |             |             |             |
| Voltage                 | 220V±10%  |             |             |             |             |             |
| Frequency               | 47Hz-63Hz   |             |             |             |             |             |
| The output              |   |             |             |             |             |             |
| Number of phase         | 1Φ2W  |             |             |             |             |             |
| Voltage                 | 0-150VAC/0-310VAC AUTO (0-600V Can be customized )                      |             |             |             |             |             |
| Frequency               | 45-500Hz ( 0.1Step )  |             |             |             |             |             |
| Maximum current         | L=120V  | 4.2A        | 8.4A        | 16.8A       | 25A         | 42A         |
|                         | H=240V  | 2.1A        | 4.2A        | 8.4A        | 12.5A       | 21A         |
| Load regulation         | 1%  |             |             |             |             |             |
| T.H.D                   | 2% Low grade 120V, high grade 240V, with pure resistive load            |             |             |             |             |             |
| Frequency stability     | 0.01%   |             |             |             |             |             |
| Display                 | Vrms、Arms、Fre、Wattage、PF  |             |             |             |             |             |
| Voltage resolution      | 0.01V   |             |             |             |             |             |
| Frequency resolution    | 0.01Hz  |             |             |             |             |             |
| Current resolution      | 0.001A  |             |             |             |             |             |
| Storage                 | M1(V_F_A)、M2(V_F_A)、M3(V_F_A)   |             |             |             |             |             |
| Communication interface | RS-232 standard, RS485 optional   |             |             |             |             |             |
| Set the current limit   | 0-MaxCurrent(P/240 Maximum current is: maximum capacity /240V is P/240) |             |             |             |             |             |
| The output protection   | OverCurrent OverTemp OverLoad ShortCircuit                              |             |             |             |             |             |
| Operation environment   | 0-40°C 20-80%RH   |             |             |             |             |             |
| Net weight (kg)         | 20.6  | 20.6        | 30.5        | 33.3        | 48          | 80          |
| Gross weight (kg)       | 23.1  | 23.1        | 33.2        | 36          | 50.8        | -           |
| Instrument size (W*H*D) | 480*135*515   | 480*135*515 | 480*225*535 | 480*225*535 | 480*240*590 | 430*590*810 |
| Packing size (W*H*D)    | 575*255*645   | 575*255*645 | 575*255*645 | 575*255*645 | 575*255*645 | -           |